

<p>(51) International Patent Classification ⁶ : H03F 3/217, 1/32</p>	<p>A3</p>	<p>(11) International Publication Number: WO 98/44626</p> <p>(43) International Publication Date: 8 October 1998 (08.10.98)</p>
<p>(21) International Application Number: PCT/DK98/00133</p> <p>(22) International Filing Date: 1 April 1998 (01.04.98)</p> <p>(30) Priority Data: 0375/97 2 April 1997 (02.04.97) DK</p> <p>(71)(72) Applicant and Inventor: NIELSEN, Karsten [DK/DK]; Rævehøjparken 19, 2. tv., DK-2800 Lyngby (DK).</p> <p>(74) Agent: K. SKØTT-JENSEN PATENTINGENIØRER A/S; Lemmingvej 225, DK-8361 Hasselager (DK).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> <p>(88) Date of publication of the international search report: 28 January 1999 (28.01.99)</p>

The diagram illustrates a closed-loop feedback system for a switching power supply. It consists of the following components and signal flow:

- Pulse modulated input V_r :** This input signal is fed into both the **Error processing** block and the **Correction Unit**.
- Error processing block:** It receives V_r and the **State Feedback** signal. It outputs the error signal V_e to the **Correction Unit**.
- Correction Unit:** It receives both V_r and V_e . It outputs a **Corrected Signal V_o** to the **Switching Power Stage**.
- Switching Power Stage (w/o filter):** It receives the **Corrected Signal V_o** and produces the final **Output V_o** .
- State Feedback:** A feedback loop that takes the **Output V_o** and feeds it back into the **Error processing** block.

To correct for any source of non-linearity and noise introduced in the power amplification of a pulse modulated signal, a correction unit is applied in-between the pulse modulator and the switching power amplification stage. The correction unit is controlled to have a compensating effect, by introducing continuous delays on the individual pulse edges on the basis of error information provided by an error processing block. One preferred embodiment of the invention comprises: a Correction Unit with means to control the delays of the individual pulse edges as a function of a control input signal v_e ; a state feedback block A with compensation; a reference shaping block R to modify the pulsed reference v_r for optimized error estimation; a difference block to generate an error signal and a compensator C to shape this error. The invention makes it possible to implement practical digital to analog power conversion, with efficient compensation of any non-linearity and noise introduced in the switching power stage and filter, such that great efficiency, high performance and low system complexity is combined. Applications are direct digital to audio power conversion and improved general DC-DC or DC-AC power conversion systems controlled from the digital domain.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 98/00133

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H03F 3/217, H03F 1/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H03F, H03K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EDOC, INSPEC, SCISEARCH

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5617058 A (APOGEE TECHNOLOGY, INC.), 1 April 1997 (01.04.97), column 3, line 21 - line 44, figures 5,6,10 --	1,2
A	US 4140980 A (FOREST M. CUMMINGS), 20 February 1979 (20.02.79), column 1, line 37 - line 46, figure 4 --	1
A	J. Audio Engineering Society, Volume 44, August 1996, N. Anderskov et al, "High-Fidelity PWM Switching Amplifiers Based on Novel Double-Loop Feedbak Technique", page 649, abstract -- -----	1

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

9 December 1998

14 -12- 1998

Name and mailing address of the ISA/

Authorized officer

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM

Bo Gustavsson

Facsimile No. +46 8 666 02 86

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

03/11/98

International application No.

PCT/DK 98/00133


Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5617058 A	01/04/97	AU 7605196 A EP 0861520 A WO 9718626 A	05/06/97 02/09/98 22/05/97
US 4140980 A	20/02/79	AU 4200378 A CA 1123067 A DE 2906949 A GB 2016243 A,B JP 54115053 A	30/08/79 04/05/82 30/08/79 19/09/79 07/09/79



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H03F 3/217, 1/32	A2	(11) International Publication Number: WO 98/44626 (43) International Publication Date: 8 October 1998 (08.10.98)
(21) International Application Number: PCT/DK98/00133 (22) International Filing Date: 1 April 1998 (01.04.98) (30) Priority Data: 0375/97 2 April 1997 (02.04.97) DK (71)(72) Applicant and Inventor: NIELSEN, Karsten [DK/DK]; Rævehøjparken 19, 2. tv., DK-2800 Lyngby (DK). (74) Agent: K. SKØTT-JENSEN PATENTINGENIØRER A/S; Lemmingvej 225, DK-8361 Hasselager (DK).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>	

(54) Title: PULSE REFERENCED CONTROL METHOD FOR ENHANCED POWER AMPLIFICATION OF A PULSE MODULATED SIGNAL

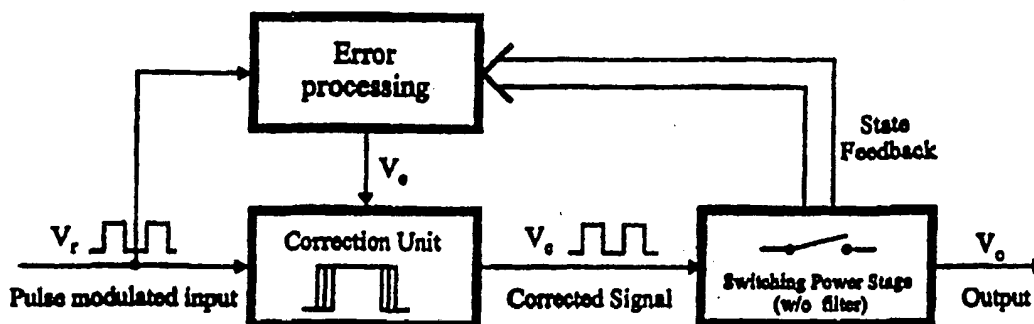

(57) Abstract

To correct for any source of non-linearity and noise introduced in the power amplification of a pulse modulated signal, a correction unit is applied in-between the pulse modulator and the switching power amplification stage. The correction unit is controlled to have a compensating effect, by introducing continuous delays on the individual pulse edges on the basis of error information provided by an error processing block. One preferred embodiment of the invention comprises: a Correction Unit with means to control the delays of the individual pulse edges as a function of a control input signal v_e ; a state feedback block A with compensation; a reference shaping block R to modify the pulsed reference v_r for optimized error estimation; a difference block to generate an error signal and a compensator C to shape this error. The invention makes it possible to implement practical digital to analog power conversion, with efficient compensation of any non-linearity and noise introduced in the switching power stage and filter, such that great efficiency, high performance and low system complexity is combined. Applications are direct digital to audio power conversion and improved general DC-DC or DC-AC power conversion systems controlled from the digital domain.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Pulse referenced control method for enhanced
power amplification of a pulse modulated signal

Technical field

5 This invention relates to power amplification of pulse modulated signals by a switching power stage. The invention may advantageously be used for improved conversion of a digital signal directly to analog power. Applications are direct digital audio power conversion and general DC-DC or DC-AC
10 power conversion systems controlled from the digital domain.

Background

The advantages of power amplification based on a switching power stage are well known. The high efficiency provides several advantages, in terms of minimal weight and volume,
15 higher power handling capability and improved reliability. The fundamental elements in switching power amplification are the modulator, the switching power stage and the demodulation filter to reconstitute the modulated signal. The non-
20 linearity of the switching power stage presents a significant impediment to maintain the modulator performance throughout the subsequent power conversion by a switching power stage. This problem is fundamental and independent on the use of analog modulation as analog PWM, or digital modulation as direct digital PCM-PWM conversion.
25

In prior art, compensation for the non-ideal behavior has generally been attempted with various feedback control methods. US Patent no. US4724396 and US Patent no. US5521549 discloses examples of this method with audio power amplification
30 as specific application. However, linear feedback control methods require an analog low frequency reference. It is desirable with a more direct digital source to power conversion to simplify the power conversion in that no separate D/A converter is needed. Furthermore, analog modulation circuitry
35 and carrier generators will not be required. International patent application no. WO92/11699 and international patent application no. WO97/37433 discloses improved methods for

- digital PCM-PWM conversion for digital digital to power amplification. In practice, these systems are hardly easy to implement, since compensation for the fundamental error sources within the switching power conversion are not provided. The application of digital feedback control referenced to the digital source is complicated in that an analog - digital converter is needed in the feedback path. This renders normal feedback control impractical.
- 10 The published international patent application EP758164 discloses a feedback method local to the switching power stage, in which the power stage output is feed back and summed with a pulse width modulated input. The resulting signal is used to drive the switching power stage. The compensation effect
- 15 however will be limited and it is difficult to control the improvements towards all error sources.

In conclusion, no invention in prior art exist for general power amplification of a pulse-modulated signal, that incorporates simple and effective means to eliminate any source of non-linearity and noise in the switching power amplification stage.

- Accordingly, the primary objective of the present invention
- 25 is to enable improved power amplification of a pulse modulated signal, where all error sources related to the power stage and demodulation filter are eliminated, such that the modulator performance can be maintained throughout the subsequent elements all the way to the output. Another objective
- 30 of the invention is to provide a practical digital PCM - power conversion system, that is insensitive to power stage non-linearity, perturbation on the power supply and any other non-ideal elements.

35 SUMMARY OF THE INVENTION

According to claims 1 and 2, the objectives of the invention are achieved by the introduction of a correction unit in-between the pulse modulator and the switching power amplifi-

cation stage. The correction unit provides compensation by means of pulse re-timing on the pulse edges, said re-timing controlled to have a "predistorting" effect, such that the resulting switching power stage output is free from distortion, noise or any other undesired contribution.

According to claim 3, one preferred embodiment of the invention is particular in that pulse re-retiming in the correction unit is a linear function of an error signal input. This is advantageous in that the resulting control system is linear, whereby system design and optimization is simplified and the performance improvement controllable.

According to claim 4, it is expedient that the pulse reference control system comprises the following fundamental elements:

- An input terminal taking a pulse modulated signal.
- A Correction Unit with means to correct the delays of the individual pulse edges, controlled by a control input.
- A state feedback with compensation.
- A reference-shaping block to modify the pulsed reference input for optimal error estimation.
- A difference block to generate an error signal and a compensator to shape this error.

The invention includes various embodiments regarding actual realization of the control function within the correction unit. According to claims 6-10, the invention includes various advantageous embodiments concerning improved digital - analog power conversion suitable for audio power amplification.

The invention is a fundamentally new control method for improved amplification of a pulse modulated input signal. The application range is extremely broad in that the invention can be used with any pulse-modulated input, modulated in the analog or digital domain, and feed any load where a pulsed power signal of controllable quality is needed. Ultimately,

the principle of the invention may realize perfect reproduction of the pulsed reference such that the output is a constant times the input, independent on any disturbances that is introduced during power conversion.

5

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be further described with reference to the drawings in which:

10 Fig. 1 shows a principle of power amplification based on either analog or digital input that is well known to the art.

Fig. 2 shows a method of power conversion based on digital pulse modulation. This approach is well known to the art.

15

Fig. 3 shows a general model of the invention.

Fig. 4 shows a preferred embodiment of the invention, in terms of a dual input pulse referenced control method based
20 on state feedback from the power stage.

Fig. 5 shows various embodiments of the invention regarding pulse edge delay error correction methods.

25 Fig. 6 shows the principle for one preferred embodiment of the invention regarding edge delay correction unit implementation that implements the expedient linear control function, by operating on both edges of the pulse.

30 Fig. 7 shows a system block diagram for one preferred implementation for a double-sided edge delay correction unit.

Fig. 8 shows an advantageous application of the invention, in terms of a digital - power conversion system for audio purposes, where the reference shaping block R is unity and the
35 feedback block A has a constant attenuation characteristic.

Fig. 9 shows a linear model for the advantageous application

of the invention in Fig. 8. The model defines an appropriate compensator for the application.

- 5 Fig. 10 shows yet another advantageous embodiment of the invention, in terms of a digital - power conversion system for audio purposes, where the reference shaping block and feedback block have first order characteristics to improved error estimation.
- 10 Fig. 11 shows yet another advantageous embodiment of the invention, in terms of a digital - power conversion system for audio purposes, where a global feedback source is used for error correction.
- 15 Fig. 12 shows the control loop characteristics for one preferred design approach for the preferred embodiment of Fig. 8.
- 20 Fig. 13 shows the closed loop system characteristics for one preferred design approach for the preferred embodiment of Fig. 8.
- 25 Fig. 14 shows the results of a simulation of error correction towards a deterministic pulse timing error source in the switching power stage. The example embodiment of the invention reduces the distortion considerably.
- 30 Fig. 15 shows a simulation of the effects of power supply perturbations. The example embodiment of the invention eliminates the intermodulation caused by this error source.

DETAILED DESCRIPTION

To fully understand the invention it is helpful to discuss the fundamental physical limitations that lies within amplification of a pulse modulated signal to power levels. Most
35 problems relate to the switching power stage that serves to amplify the pulses coming from the modulator. It is expedient to divide the error sources in to pulse timing errors (PTE)

and pulse amplitude errors (PAE). Pulse Timing Errors arise from:

- Delays from turn-on or turn-off to the actual transition at the output of the switching power stage are different in the turn-on and turn-off case. The delays depend on various parameters in the power switch physics and in the hardware, that drives the switches.
- The delay between a turn-off and the following turn-on in a switching leg.
- The finite rise- and fall-times as opposed to the infinitely fast switching required by theory.

Pulse Amplitude Errors (PAE) mainly arise from:

- Noise from the power supply that feeds the switching power stage. Any power supply ripple or noise will intermodulate with the modulated audio signal, and the switching power stage has a Power Supply Rejection Ratio (PSRR) of 0dB.
- Finite impedance for the power switches.
- High frequency resonant transients on the resulting pulse power signals.

There are additional error sources relating to the non-ideal modulation and non-ideal demodulation. The demodulation filter errors may introduce further distortion, since magnetic core materials are not ideal. In addition, the filter increases the total output impedance. Accordingly, changes in load impedance will distort the frequency response.

Fig. 1 shows a method, well known in the art, to realize power amplification based on analog pulse modulation techniques. The modulator output feeds a switching power stage, the output of which is demodulated and feed to the load. A linear control system referenced to the analog input serves to minimize the errors within the power conversion, such that the effects of the above mentioned errors can be minimized. A digital input requires a separate D/A converter to generate the analog input that serves as input to the control system. Fig. 2 illustrates the simplified and desirable system for

direct digital to analog power conversion using digital pulse modulation techniques, also well known in prior art. The application of error feedback control is complicated in that an analog/digital converter would be needed to enable comparison with the digital reference source. This compromises both performance and complexity and renders the method impractical.

The new principle of the invention is shown by the general block diagram in Fig. 3. The modulator is feed to a correction unit that serves to correct or "predistort" the pulse modulated signal v_r to generate the compensated pulse signal v_c , such that the said non-ideal behavior within the subsequent power conversion and demodulation are eliminated. This is carried out by means of intelligent pulse edge delays on each of the pulse edges, controlled by an input control signal v_e to the correction unit. The method will henceforth be referenced to as Pulse Edge Delay Error Correction (PEDEC).

The invention is a fundamentally new control method for improved amplification of a pulse modulated input signal. The application range is broad in that the invention can be used with any pulse-modulated input, modulated in the analog or digital domain, and feed any load where a pulsed power signal of controllable quality is needed.

The invention relies on two fundamental facts:

- The pulse modulator can generate a very high quality pulsed waveform, that may be used as reference for the control system.
- All error sources (PAE or PTE) within the switching power conversion can be corrected by intelligent pulse re-timing and all error sources only need minor pulse edge re-timing for perfect elimination.

The edge correction may be implemented using single-sided or double-sided edge delay correction, as shown conceptually in Fig. 5. The choice of single or double edge correction is independent of the type of modulation method. The control of

both edges leads to efficient correction and furthermore has simple implementation strategies. Subsequently, the following description of this aspect of the invention will focus on double edge correction.

5

One preferred embodiment of the invention is shown Fig. 6. The dual input pulse referenced feedback control system comprises:

- An input terminal that is feed by a pulse modulated reference signal v_r .
- A Correction Unit (PEDEC unit) with means to control the delays of the individual pulse edges and generate the corrected output pulse signal v_c .
- A state feedback block A including compensation from the power stage block.
- An optional reference shaping block R .
- A subtraction unit to derive error information.
- A compensator C to shape said error and feed the Correction Unit with said shaped error v_e .

20

The correction unit may be realized by various linear and also non-linear methods. A particularly advantageous embodiment of the invention regarding PEDEC unit realization is described hereinafter. It proves advantageous to let the control error signal v_e to the PEDEC unit realizes an effective change in pulse width Δt_w at the end of each switching cycle that is proportional to the control signal input v_e :

25

$$\frac{dt_w}{dv_e} = k_w \quad (1)$$

By averaging within a single switching cycle, the relationship between an increment in pulse width Δt_w and the corresponding change in the average of the PEDEC unit output $\Delta \bar{v}_c$ can be established. Assume for simplicity in the following that the PEDEC unit output pulse amplitude is unity. $\Delta \bar{v}_c$ is related to Δt_w as:

35

$$\Delta \tilde{v}_c = \frac{1}{t_s} \left(\int_0^{d t_s + \Delta t_w} 1 \cdot dt + \int_{d t_s + \Delta t_w}^{t_s} (-1) \cdot dt \right) = \frac{2}{t_s} \Delta t_w \quad (2)$$

Where d is the duty-cycle within the present switching cycle and t_s is the switching period. Hence:

$$\frac{d \tilde{v}_c}{d t_w} = \frac{2}{t_s} \quad (3)$$

5

Combining and (1) and (3), the linear control function arrives:

$$k_{PEDEC} = \frac{d \tilde{v}_c}{d v_e} = \frac{2 k_w}{t_s} \quad (4)$$

10 This preferred linear control function is advantageous in that it simplifies controller design and provides controllable performance improvements compared to e.g. the implementation of a non-linear control function.

15 A preferred embodiment of the invention is particular in that the implementation of a double-sided correction unit that implements (4) is simple. The method is shown in Fig. 6. The linear control function is realized by a limited integration of the reference v_r , thus generating the signal v_i . A comparison between the modified reference with the control signal v_e caused the pulse edges to be re-timed. From Fig. 6 in
20 follows that:

$$\begin{aligned} \hat{t}_w &= t_w - t_0 \frac{v_e}{V_l} \Rightarrow \\ \Delta t_w &= \hat{t}_i - \hat{t}_f = \begin{cases} t_0 & (v_e > 1) \\ t_0 v_e & (-1 \leq v_e \leq 1) \\ -t_0 & (v_e < -1) \end{cases} \quad (5) \end{aligned}$$

Where (^) indicates the corrected variable after passing the PEDEC unit. It is assumed that all pulse amplitudes are normalized to unity. In this preferred implementation, k_w as defined in (1) is:

5

$$k_w = \frac{dt_w}{dv_e} = t_0 \quad (6)$$

The following equivalent control gain emerge for the proposed implementation of double sided edge correction:

$$k_{PEDEC} = \frac{2t_0}{t_s} \quad (7)$$

10

Fig. 7 shows a preferred implementation of the double-sided edge correction method. The method is very simple and straightforward.

15 For optimal control in this preferred solution, the pulses should have a certain minimal width. The minimum pulse width for optimal performance is related to the modulation index M and switching period t_s as:

$$t_{w,min} \geq t_0 \Rightarrow M_{max} = 1 - \frac{2t_0}{t_s} \quad (8)$$

20

This constraint on pulse width and maximal modulation index M_{max} does not present a fundamental limitation, since the correction still will work partially beyond this limit. Since only a limited correction range is generally needed, t_0 is preferably on order of magnitude or more lower than t_s .

25

The invention includes several embodiments regarding the application of the invention specifically in digital to analog power conversion. One preferred embodiment is the system shown in Fig. 8. Using PEDEC in combination with one of the high performance digital pulse width modulation methods (PCM-

30

PWM methods) that are known to the art, the signal will remain digital or pulsed throughout the main audio chain. No analog modulator or carrier generator is needed as with analog pulse modulation, since the system is controlled exclusively by the digital modulator. In this particular embodiment of the invention, the state feedback is a voltage feedback from the switching power stage output v_p . The feedback path compensator is a simple attenuation, and the compensator block $C(s)$ is a linear filter. Despite the simple controller structure of this particular embodiment, the system introduces a very powerful and flexible control of system performance.

The preferred linear control function provides great flexibility in performance optimization. An example of PEDEC control system design is specified in the following. The compensator is defined in the linear model of the system as shown in Fig. 9. The PEDEC unit has been replaced by its equivalent linear gain and the resulting system has been redrawn to emphasize the dual input character of the PEDEC based digital to power conversion system. The specified compensator provides sufficient flexibility to optimize the performance to various characteristics. The resulting loop transfer function is derived directly from the system model:

$$\begin{aligned}
 L(s) &= \frac{K_P k_{PEDEC}}{K} C(s) \\
 &= \frac{K_C K_P k_{PEDEC}}{K} \frac{\tau_{z1}s + 1}{(\tau_{p1}s + 1)(\tau_{p2}s + 1)(\tau_{p3}s + 1)}
 \end{aligned}
 \tag{9}$$

All non-ideal effect as noise, distortion or power supply perturbations that influence the power stage gain K_p are reduced by the sensitivity function $S(s) = (1 - L(s))^{-1}$. The actual loop shaping is a compromise between loop bandwidth and the desired sensitivity function. Further considerations are stability and robustness to uncertainty in system parameters. Table 1 gives a set of normalized system parameter values that will lead an appealing compromise between these aspects.

The compensator DC gain K_C is optimized to yield the desired loop bandwidth. A bandwidth of 6-8 times target bandwidth is a good compromise between efficiency and error correction capability. Fig. 12 shows Bode plots for each component and the resulting loop transfer function.

Parameter	Value	Comment
k_{PEDEC}	0.2	Equivalent PEDEC unit gain.
K	10	System gain = 20dB
K_P	10	Equivalent power stage gain = 20dB
f_u	6	Bandwidth
$f_{p1} = \frac{1}{2\pi\tau_{p1}}$	$\frac{f_u}{20}$	Loop parameter
$f_{p2} = \frac{1}{2\pi\tau_{p2}}$	$\frac{f_u}{20}$	Loop parameter
$f_{p3} = \frac{1}{2\pi\tau_{p3}}$	$2f_u$	Loop parameter
$f_{z1} = \frac{1}{2\pi\tau_{z1}}$	$\frac{f_u}{2}$	Loop parameter
f_f	2	Filter natural frequency
Q_f	$\frac{1}{\sqrt{3}}$	Filter Q (Bessel characteristic)

Table 1 Example of frequency normalized parameters

The gain of the system is controlled by the A-block, and with the given example embodiment, the PEDEC control system will force the system gain to be constant within the target bandwidth. This stabilizes both system gain and the frequency response. According to the linear model for this example embodiment of the invention in Fig. 9, the resulting system response is constituted of two contributions, since the reference has two inputs in the loop. The system transfer function is:

$$\begin{aligned}
 H(s) &= \frac{C(s)K_p k_{PEDEC}}{1+L(s)} + \frac{K_p}{1+L(s)} \\
 &= \frac{K_p [C(s)k_{PEDEC} + 1]}{1+L(s)}
 \end{aligned}
 \tag{10}$$

In the special (but not unusual) case where $K=K_p$, the system transfer function is constant:

$$H(s) = \frac{K[C(s)k_{PEDEC} + 1]}{1+C(s)k_{PEDEC}} = K \tag{11}$$

5

In the general case:

$$H(s) \approx \begin{cases} K & (f < f_u) \\ K_p & (f \gg f_u) \end{cases} \tag{12}$$

Fig. 13 shows the resulting Bode plots for the closed system, consisting of two contributions forming the loop response and a total system response with the demodulation filter. The constant gain characteristic of the loop caused by $K=K_p$. The demodulation filter exclusively determines the response of the system.

15

The parameters of the example embodiment above are only illustrative and various other system characteristics can be devised by other loop transfer function gain / bandwidth compromises etc.

20

Other advantageous embodiments, also suitable for high quality digital to power conversion are shown Fig. 10 and Fig. 11. These alternative embodiments are characterized by using different compensator and reference shaping blocks. The embodiment in Fig. 10 is preferably based on a first order characteristic in both the reference shaping block $R(s)$ and the feedback compensator $A(s)$. The advantages in the demodulation of both reference and feedback signal are minimized noise within the control system and furthermore lower band-

25

width requirements for the feedback compensator. The embodiment in Fig. 11 is based on a global feedback source such that demodulation filter errors are included within the loop and also corrected for. This requires a second order reference shaper for optimal error estimation.

The correction effects towards pulse timing errors (PTE) is shown in Fig. 14, where THD for the open loop system and three PEDEC controller configurations have been investigated at the worst case signal frequency. Clearly, the controller considerably reduces the effects of this particular error source. Furthermore, adjusting the compensator gain K_c can control the improvements. In this particular situation the distortion is reduced 20dB - 30dB. Fig. 15 shows an investigation of PAE with a severe power supply perturbation of 10 Vpp. Top figure visualizes the clear intermodulation between power supply and signal. Bottom figure shows how the PEDEC controller eliminates this effect such that the intermodulation is no more visible in the time domain. The intermodulation distortion is reduced more than 40dB compared to the open loop case, as predicted by the sensitivity function in theory.

Although the invention is described hereinbefore with respect to illustrative embodiments thereof, it will be appreciated that the foregoing and various other changes, omissions and additions may be made without departing from the spirit and scope of this invention.

P A T E N T C L A I M S :

1. A method to correct for any source of non-linearity and noise introduced in the power amplification of a pulse modulated signal, characterized by the introduction of a correction unit in-between the pulse modulator and the switching power amplification stage, said correction unit introducing continuous delays on the pulse edges, controlled to have a compensating effect.

10

2. A system according to claim 1, characterized in that the pulse edge delay correction is performed on either the leading edge, trailing edge or both edges of the incoming pulse modulated signal.

15

3. A system according to claims 1-2, characterized in that the correction is carried out by an effective pulse width change Δt_w in every switching cycle, controlled as a linear control function of a error signal v_e to the correction unit, such that a general linear relation $\Delta t_w = k_w \cdot v_e$ is established.

20

4. A method according to claims 1-3, characterized in that the system comprises:

- An input terminal taking an pulse modulated signal
- A correction unit with means to control the delays of the individual pulse edges.
- A state feedback block with compensation from the power stage block.
- An optional reference shaping block.
- A subtraction unit, to derive error information.
- A compensator to shape said error and feed the Correction Unit with said shaped error.

25

5. A method according to claim 4, characterized in that the implementation of the double sided edge correction is realized by a limited integration of the pulsed reference to generate a new signal

30

35

v_i , such that a comparison of v_i with the error signal v_e within the correction unit realizes a linear control function on the form $\Delta I_w = k_w \cdot v_e$.

5 6. Use of the methods according to claims 1-5 where the reference input is modulated by pulse width modulation.

 7. Use of the methods according to claims 1-5 to realize an improved general digital PCM - analog power conversion
10 system.

 8. A system according to claims 4-7,
c h a r a c t e r i z e d i n that the state feedback is
the local switching power output voltage v_p , and the reference
15 shaping block is unity.




 9. A power amplifier according to claims 4-7,
c h a r a c t e r i z e d i n that the state feedback is
the local switching power output, the feedback compensation
20 is a first order filter, and the reference shaping block
equally realizes a first order system.

 10. A power amplifier according to claim 4-7,
c h a r a c t e r i z e d i n the state feedback is the
25 global amplifier output, the reference shaping block a second
order filter and the feedback path compensation a constant
attenuation.

 11. A power amplifier according to claims 1-10,
30 c h a r a c t e r i s e d i n that the switching power
stage output directly drives a loudspeaker or other load with
pulses directly from the switching power stage.

35

1/7

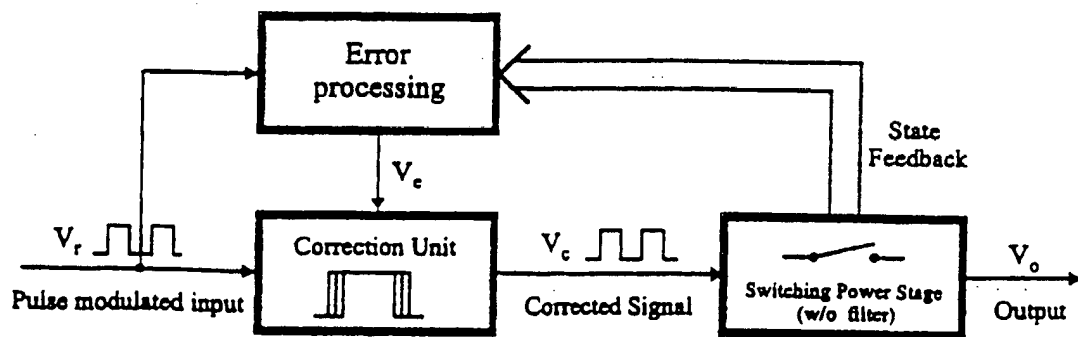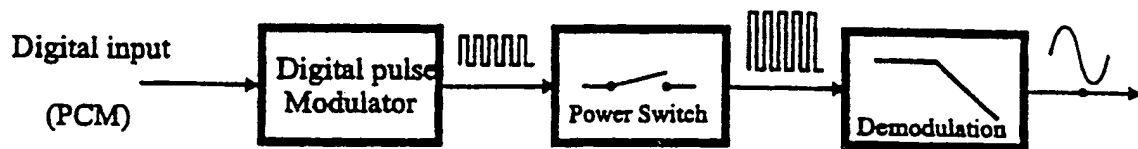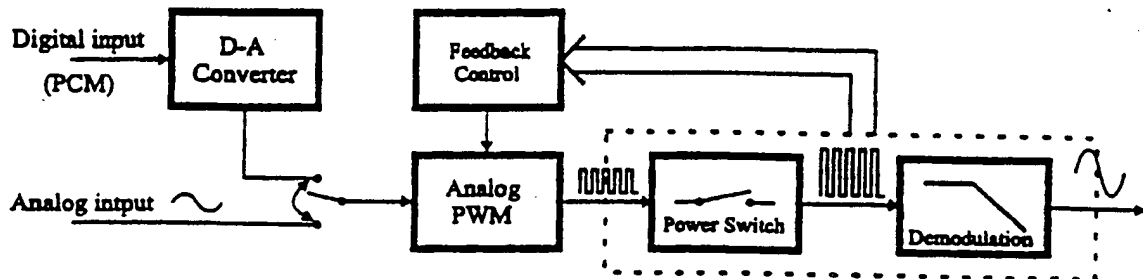

2/7

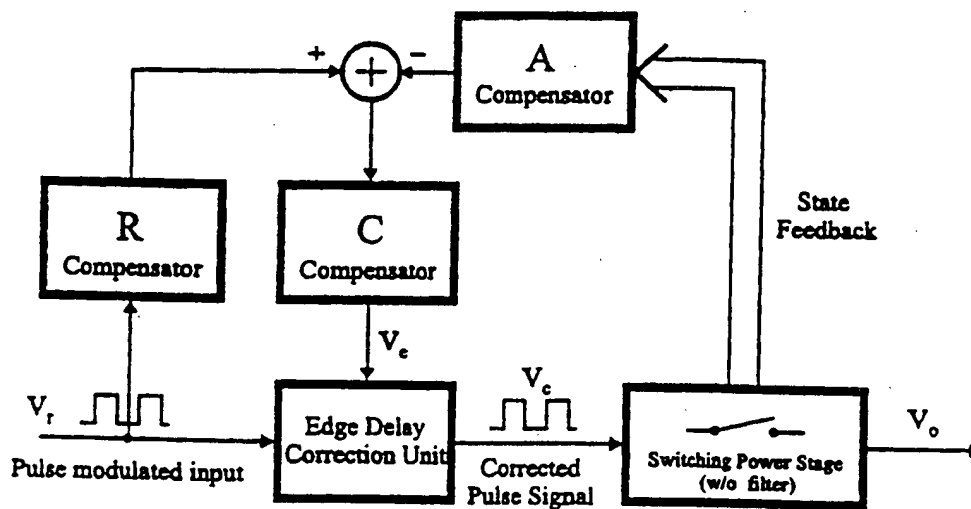


Fig. 4

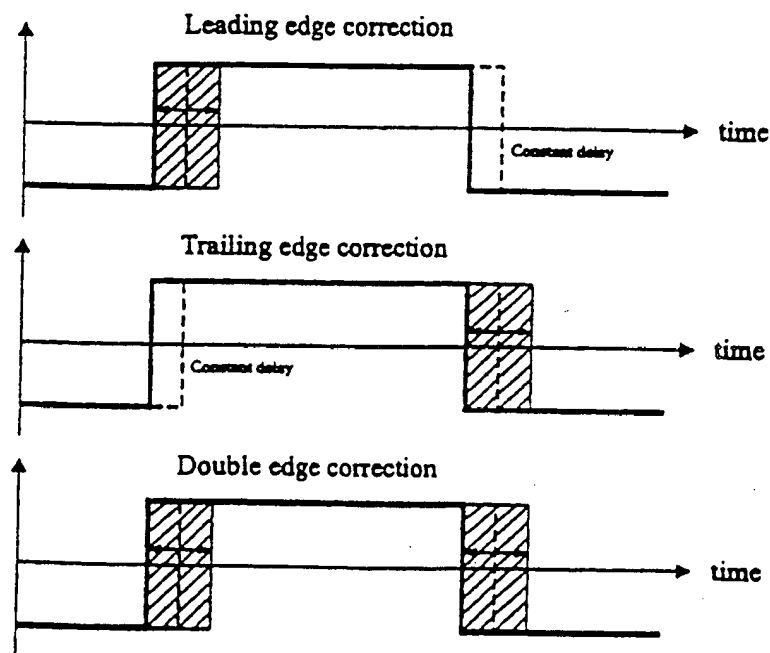


Fig. 5

3/7

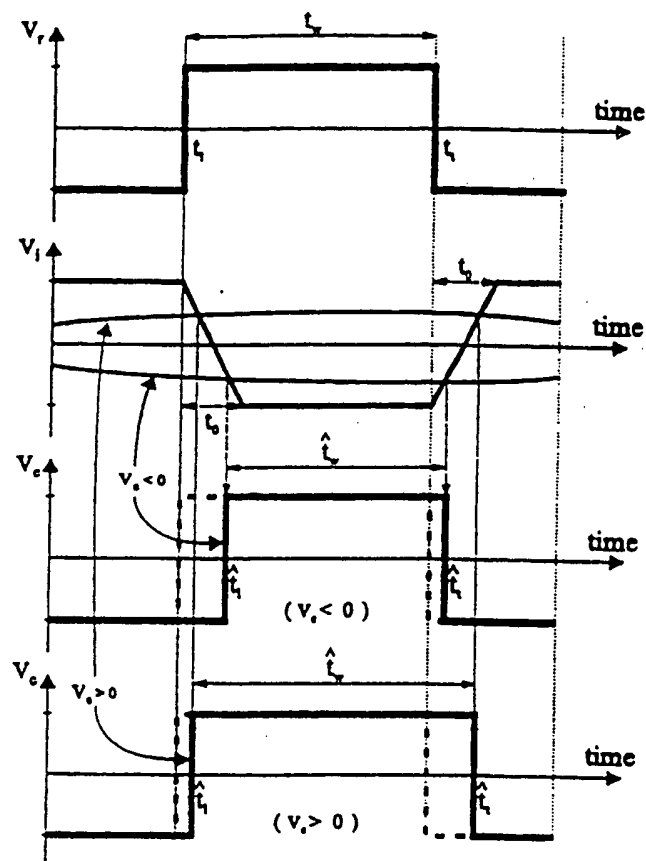


Fig. 6

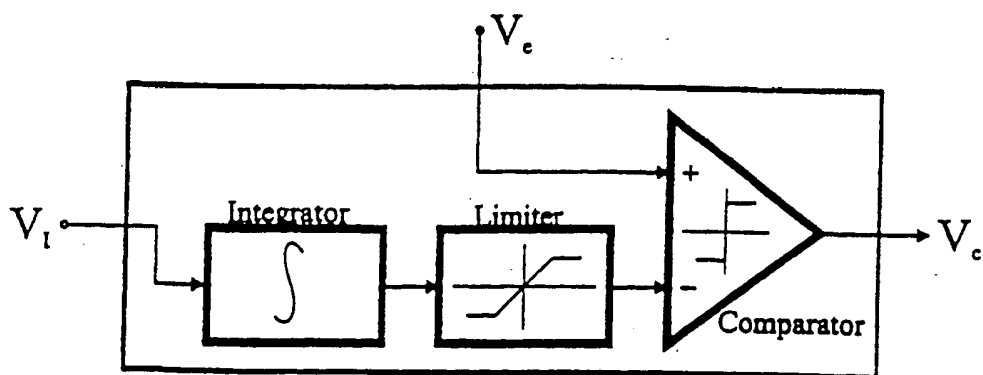


Fig. 7

4/7

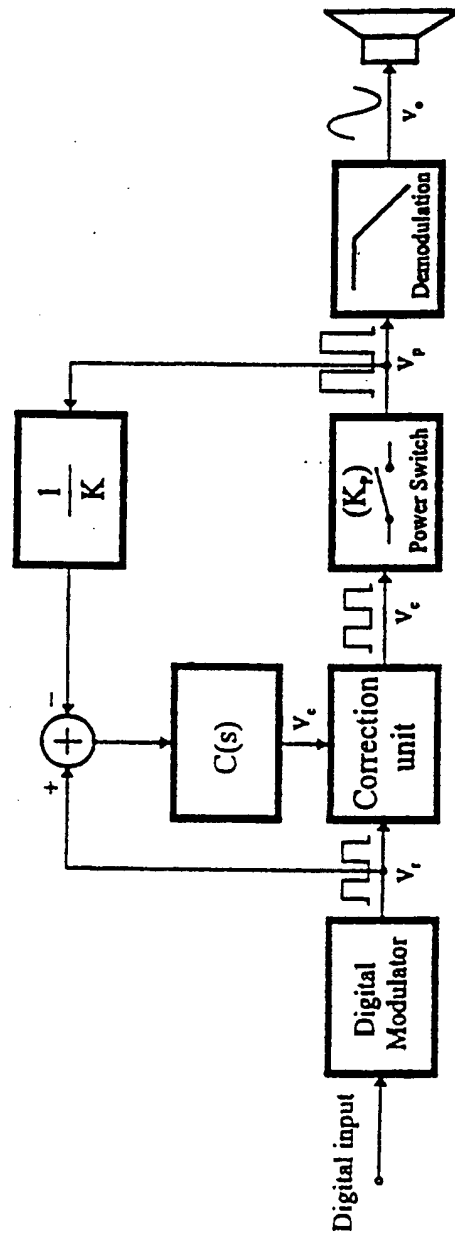


Fig. 8

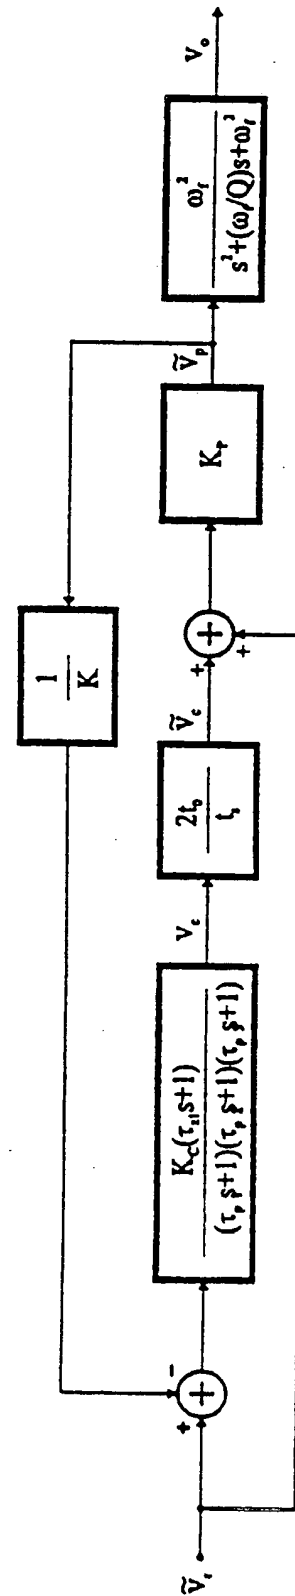


Fig. 9

5/7

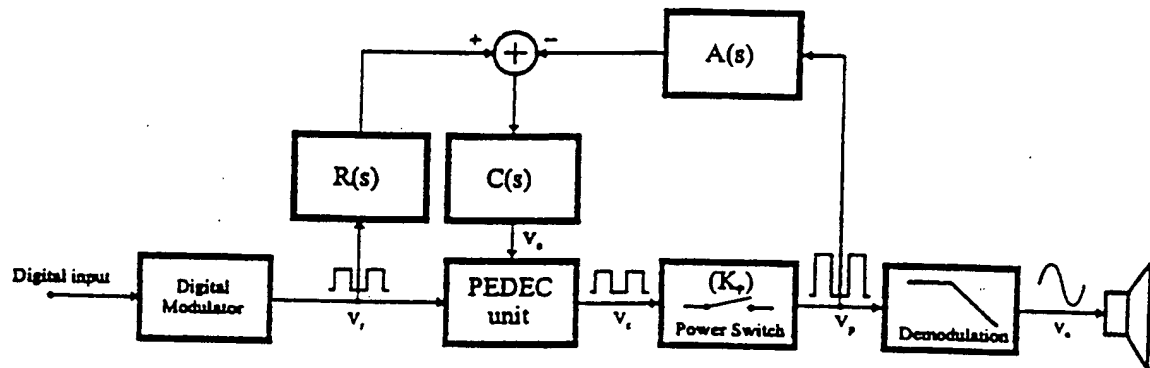


Fig. 10

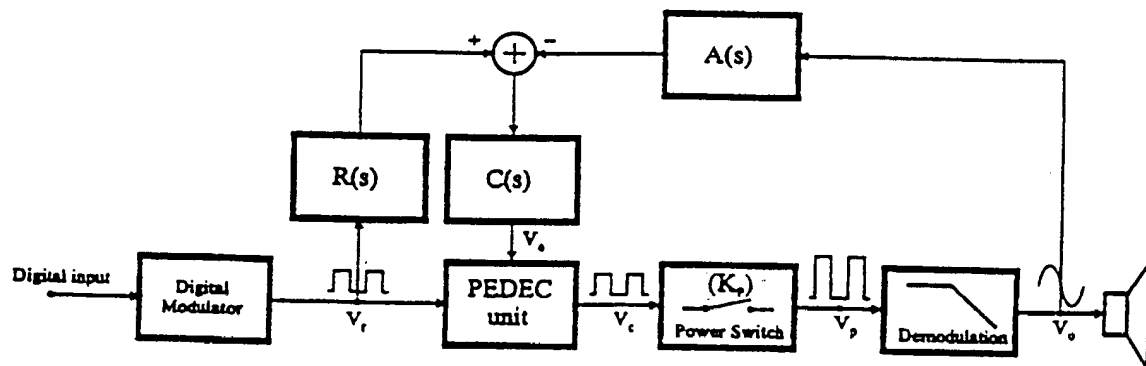


Fig. 11

6/7

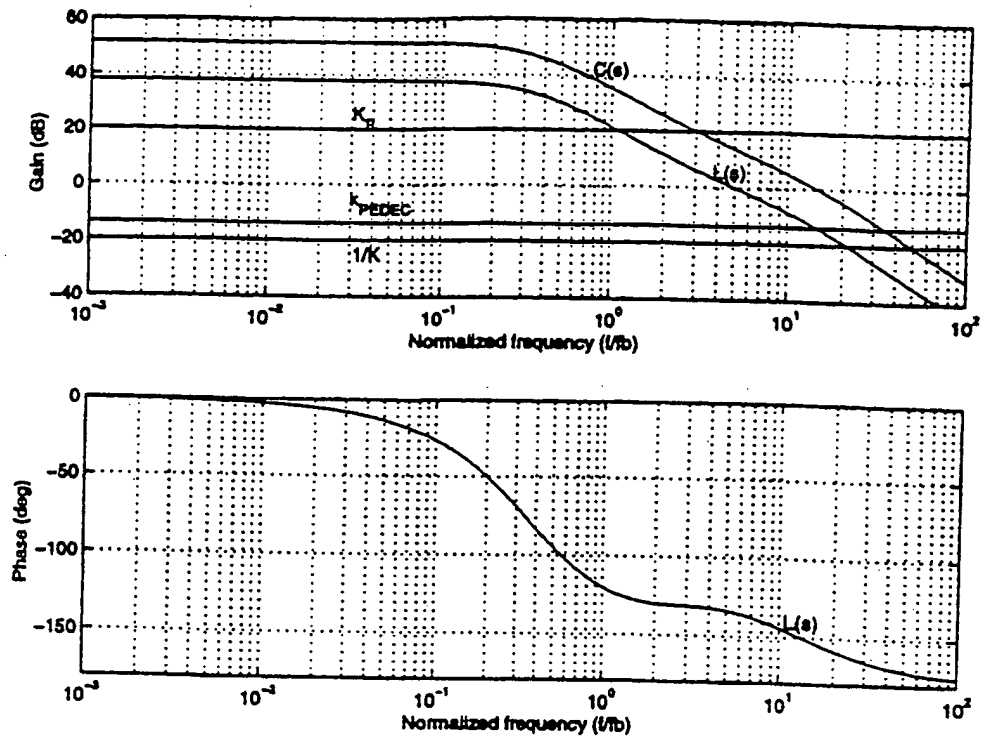


Fig. 12

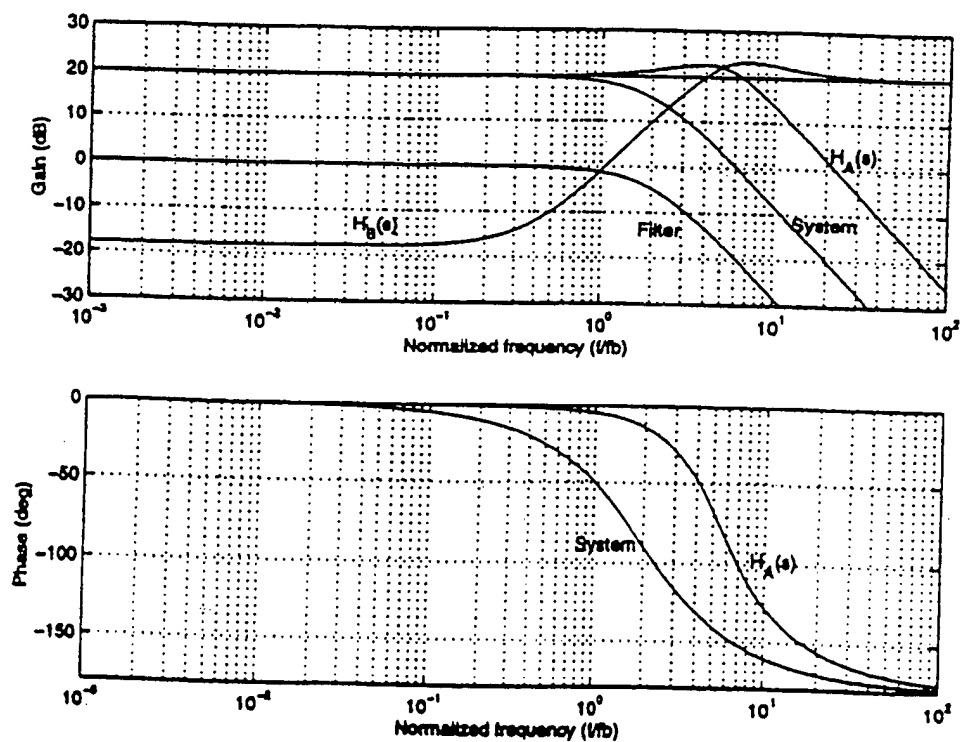


Fig. 13

SUBSTITUTE SHEET (RULE 26)

7/7

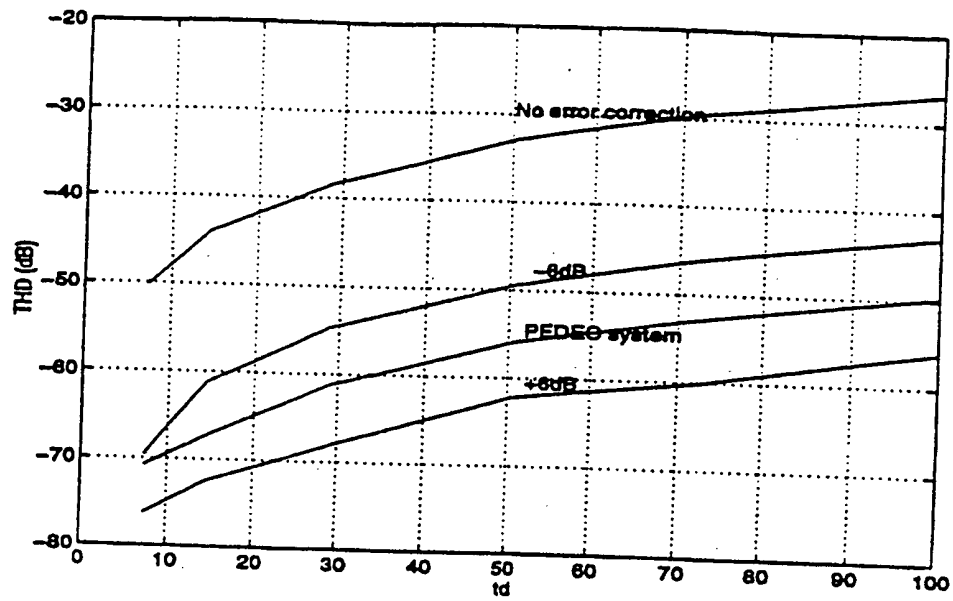


Fig. 14

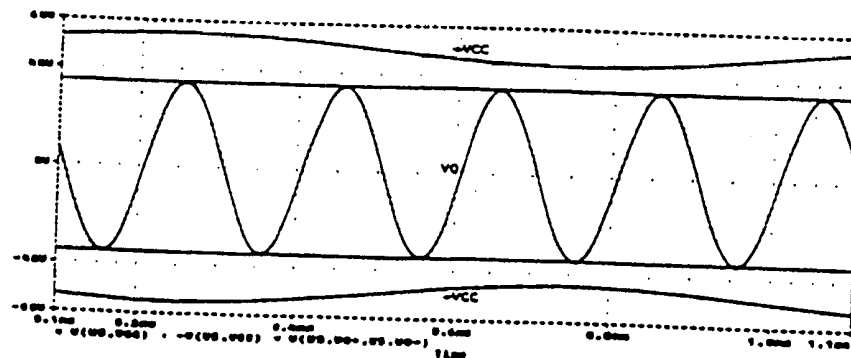
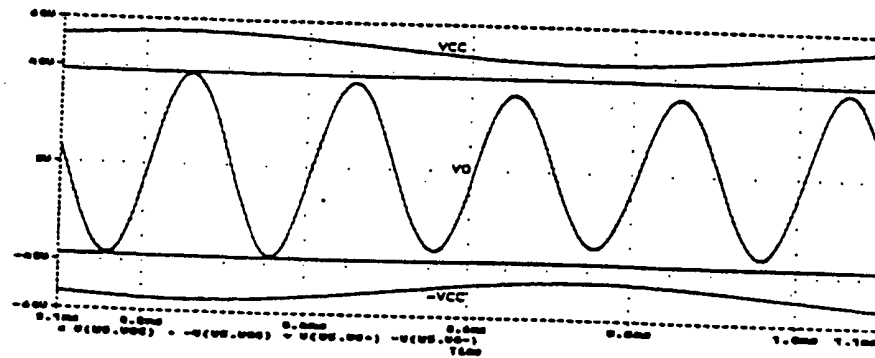


Fig. 15